
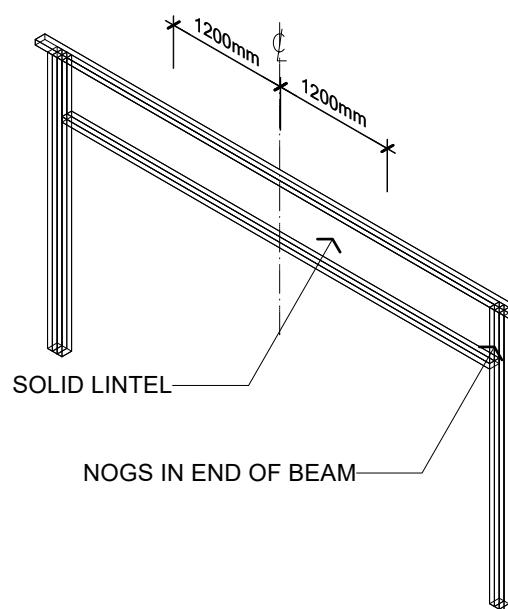


#### CUSTOM DOORS

DOOR HEIGHT      'X'      'Y'

UP TO 2200mm	1100mm - 2100mm	2000mm - 3000mm
UP TO 2500mm	800mm - 1600mm - 2400mm	2000mm - 3000mm
UP TO 2800mm	900mm - 1800mm - 2700mm	1800mm - 3640mm

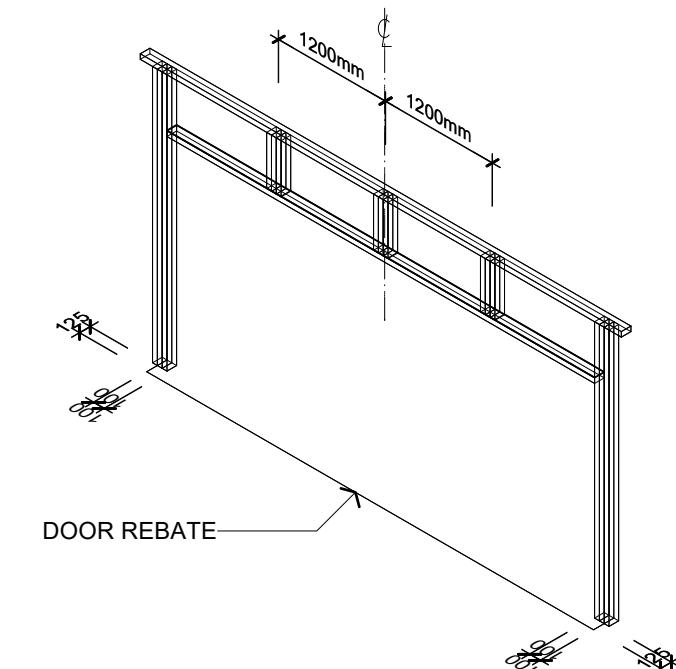

#### NOTES

IF USING AN ARCHITRAVE AROUND THE DOOR OPENING, USE EITHER OF THE FOLLOWING TWO OPTIONS

1. NARROW ARCHITRAVE (LESS THAN 60mm) AROUND PERIMETER OF THE OPENING
2. WIDE ARCHITRAVE (MORE THAN 60mm) ON THE SIDES FROM THE FLOOR TO THE CEILING AND IN THE CENTRE OF THE LINTEL WITH A NARROW ONE ACROSS THE LINTEL

#### IMPORTANT

1. PLEASE ENSURE GIB AND ARCHITRAVES ARE ON
2. GARAGE FLOOR IS CLEAR OF ANY OBSTRUCTIONS
3. OTHER TRADESPeOPLE ARE NOT WORKING IN THE GARAGE AT TIME OF INSTALLATION

CHARGES MAY APPLY IF THE ABOVE CRITERIA IS NOT MET.



DISCLAIMER: VERIFY ALL DIMENSIONS WITH THE GARAGE DOOR COMPANY LIMITED PRIOR TO MANUFACTURING AND COMMENCING WORK.

ISSUE	DATE	REVISION	PROJECT	PROJECT #
			FIXING DETAILS - SECTIONAL GARAGE DOORS	
CLIENT				
DWG	CUSTOM DOORS			GDC-02
			DATE #      OCT 2024	DWG #
			SCALE @ A3      1:25	
			DRAWN	
			CHKD	
			REVISION	